


## 殼型鎢鋼固定頂針

## TYPE:332

## SHELL SOLID CENTERS OF CARBIDE TIPPED

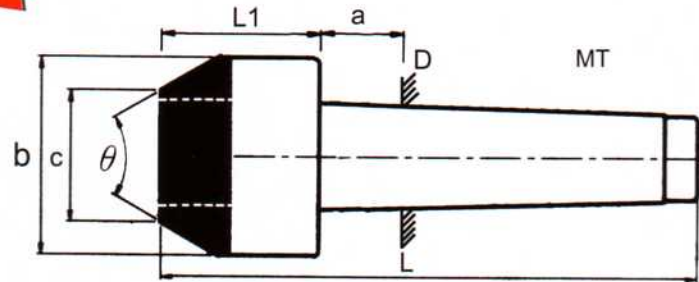

### 特性:

- (1)本體使用"S45C"之材質；經過熱處理。
- (2)本體及頂心經過精密研磨處理。
- (3)適用於車床及磨床等機械。
- (4)外徑斜度(Morse Taper)採用DIN806規格。

### Characteristics:

- (1)Body is made of "S45C" with heat treatment.
- (2)Body and Center is under precise grinding process.
- (3)Application to lathe and grinder.
- (4)Morse Taper complies with DIN806 standard.

單位:m/m

產品編號 STYLE No.	產品規格 MODEL No.	D	a	b	c	L1	L	Co.精度 Accuracy	θ
332-03140-3516	MT3C35-16	23.825	5	35	16	54	140	0.005	60°
332-03155-3516	MT3C35-16-155	23.825	5	35	16	69	155	0.005	60°
332-03140-4020	MT3C40-20	23.825	5	40	20	54	140	0.005	60°
332-03155-4020	MT3C40-20-155	23.825	5	40	20	69	155	0.005	60°
332-03140-5030	MT3C50-30	23.825	5	50	30	54	140	0.005	60°
332-03155-5030	MT3C50-30-155	23.825	5	50	30	69	155	0.005	60°
332-04160-3516	MT4C35-16	31.267	6.5	35	16	51	160	0.005	60°
332-04175-3516	MT4C35-16-175	31.267	6.5	35	16	66	175	0.005	60°
332-04160-4020	MT4C40-20	31.267	6.5	40	20	51	160	0.005	60°
332-04175-4020	MT4C40-20-175	31.267	6.5	40	20	66	175	0.005	60°
332-04160-5030	MT4C50-30	31.267	6.5	50	30	51	160	0.005	60°
332-04175-5030	MT4C50-30-175	31.267	6.5	50	30	66	175	0.005	60°