


## 半邊鎢鋼固定頂針

## TYPE:312

## HALF-SIDE SOLID CENTERS OF CARBIDE TIPPED

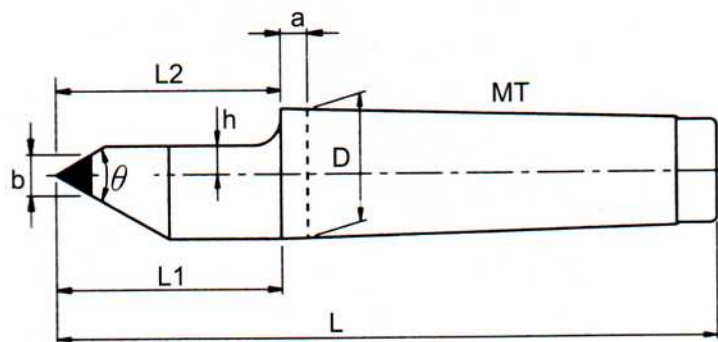

### 特性:

- (1)本體使用"S45C"之材質；經過熱處理。
- (2)本體及頂心經過精密研磨處理。
- (3)適用於車床及磨床等機械。
- (4)外徑斜度(Morse Taper)採用DIN806規格。

### Characteristics:

- (1)Body is made of "S45C" with heat treatment.
- (2)Body and Center is under precise grinding process.
- (3)Application to lathe and grinder.
- (4)Morse Taper complies with DIN806 standard.

單位:m/m

產品編號 STYLE No.	產品規格 MODEL No.	D	a	b	h	L1=L2	L	Co.精度 Accuracy	$\theta$
312-01006-0040	MT1C06	12.065	3.5	6	4	25	82	0.005	60°
312-02006-0040	MT2C06	17.780	5	6	4	31	100	0.005	60°
312-03006-0040	MT3C06	23.825	5	6	4	39	125	0.005	60°
312-03008-0050	MT3C08	23.825	5	8	5	39	125	0.005	60°
312-03010-0060	MT3C10	23.825	5	10	6	39	125	0.005	60°
312-04006-0040	MT4C06	31.267	6.5	6	4	46	155	0.005	60°
312-04010-0060	MT4C10	31.267	6.5	10	6	46	155	0.005	60°
312-04014-0037	MT4C14(h:3.7)	31.267	6.5	14	3.7	46	155	0.005	60°
312-04014-0080	MT4C14	31.267	6.5	14	8	46	155	0.005	60°
312-05014-0080	MT5C14	44.399	6.5	14	8	64	200	0.005	60°
312-06018-0100	MT6C18	63.348	8	18	10	80	270	0.005	60°