
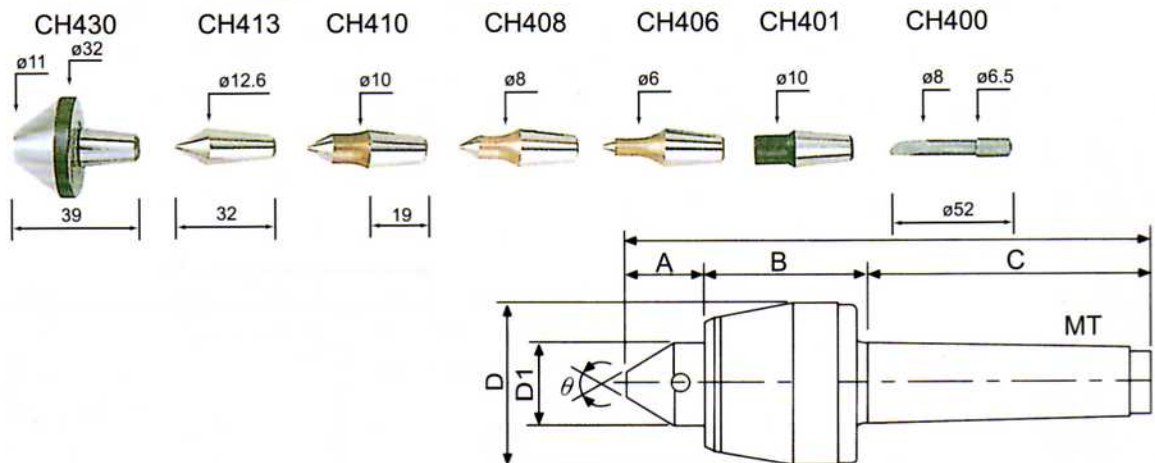


重切削互換式迴轉頂針

TYPE:535

EXCHANGEABLE LIVE CENTERS FOR HEAVY-DUTY

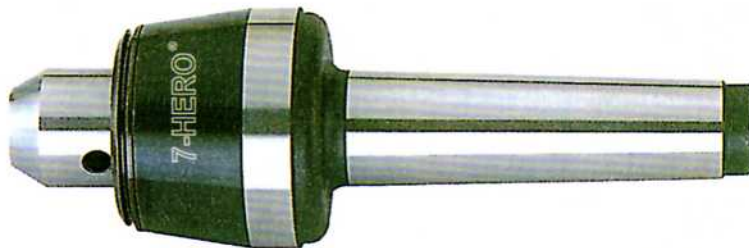


特性:

- (1)心軸使用"軸承鋼"之材質,經真空熱處理為(HRC60°±2°),具高剛性,耐磨性。
- (2)此頂針使用雙列斜角滾珠軸承,止推軸承,滾針軸承之組合。使用航太潤滑油脂,具防水性。
- (3)適用於高速,中負荷或NC車床之加工切削。
- (4)可更換不同尺寸之頂心,便於加工工件。

Characteristics:

- (1)Shaft is made of "Bearing Steel" under vacuum heat treatment (HRC60°±2°) with high rigidity and wear-resistant quality.
- (2)Center is assembled with dual-row bevel ball bearing, thrust bearing, needle ball bearing, and adopts lubricant grease with waterproof quality.
- (3)Applicable to medium duty load, or high-speed lathe or NC lathe, etc. processing or cutting.
- (4)Center is exchangeable with different size, and is available for workpiece processing.

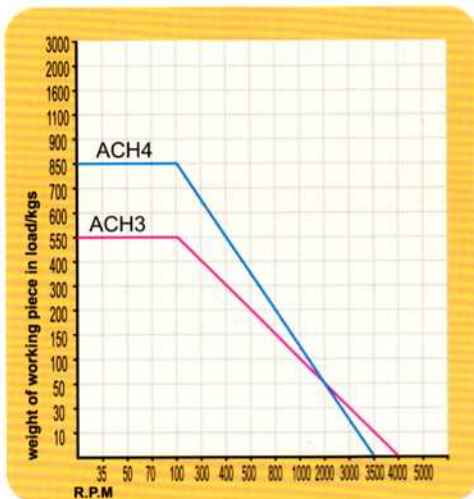

單位:m/m

產品編號 STYLE No.	產品規格 MODEL No.	A	B	C	D	D1	L	Co.精度 Accuracy	Max. R.P.M	Max. Wt	θ
535-03000-0000	ACH3 (MT3)	28	55	86	53	30	169	0.005	4000	550	60°
535-04000-0000	ACH4 (MT4)	30	62	108	63	32	200	0.005	3500	850	60°